


Introduction to Containers

Martin Čuma

Center for High Performance Computing

University of Utah

m.cuma@utah.edu



- Why do we want to use containers?
- Containers basics
- Run a pre-made container
- Build and deploy a container
- Containers for complex software

1. Download the talk slides

<http://home.chpc.utah.edu/~mcuma/chpc/Containers20s.pdf>


<https://tinyurl.com/yd2xtv5d>

2. Using FastX or Putty, ssh to any CHPC Linux machine, e.g.


```
$ ssh uxxxxxxx@frisco.chpc.utah.edu
```

3. Load the Singularity and modules

```
$ module load singularity
```



1. Create a GitHub account if you don't have one
<https://github.com/join>
{Remember your username and password!}
2. Go to <https://cloud.sylabs.io/home>
click Remote Builder, then click Sign in to Sylabs and then Sign in with GitHub,
using your GitHub account
3. Go to <https://cloud.sylabs.io/builder>
click on your user name (upper right corner), select Access Tokens, write token
name, click Create a New Access Token, and copy it
4. In the terminal on frisco, run the following command and paste the token when
prompted:
`singularity remote login`




Why to use containers?

- Some programs require complex software environments
 - OS type and versions
 - Drivers
 - Compiler type and versions
 - Software dependencies
 - glibc, stdlibc++ versions
 - Other libraries and executables
 - Python/R/MATLAB versions
 - Python/R libraries

- Research outputs include software and data
- Software reproducibility
 - Software repositories (svn, git)
 - Good but often software has dependencies
- Data reproducibility
 - Data as publication supplementary info, centralized repositories (NCBI), ...
 - Disconnected from the production environment
- Package data AND code AND compute environment in one file



- Develop a program / pipeline locally, run globally
- Scale to parallel resources
 - Run many times
 - Use local or national HPC resources
- Automate the process
 - Container/software building and deployment
 - Parallel pipeline

- Old applications built on old Linux versions can run on newer Linux host, and vice versa
- May be able to run Windows programs on Linux



Container basics


- Hardware virtualization
 - Running multiple OSes on the same hardware
 - VMWare, VirtualBox
- OS level virtualization
 - run isolated OS instance (guest) under a server OS (host)
 - Also called containers; user defined software stack (UDSS)
 - Docker, Singularity

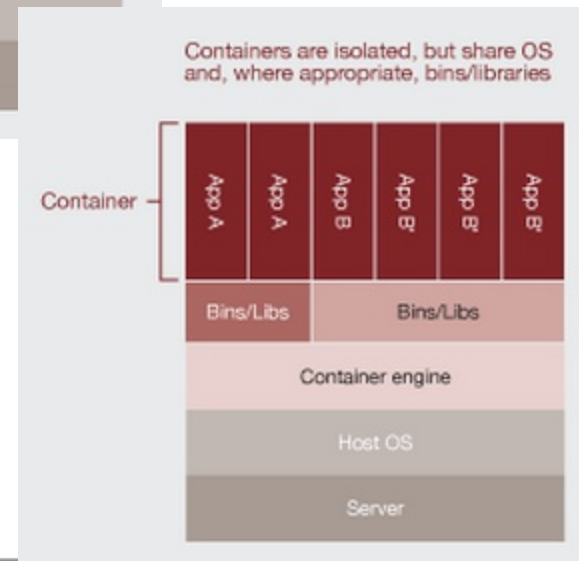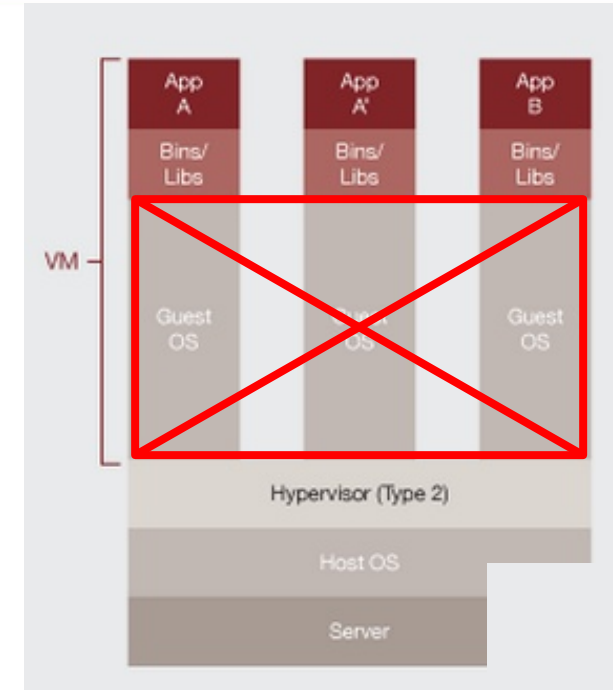

- Isolate computing environments
 - And allow for regenerating computing environments
- Guest OS running over host OS
 - Guest's OS can be different than host's
 - Low level operations (kernel, network, I/O) run through the host
- From user standpoint guest OS behaves like standard OS

- Docker
 - Well established
 - Has docker hub for container sharing
 - Problematic with HPC
- Singularity
 - Designed for HPC, user friendly
 - Support for MPI, GPUs
- Charliecloud; Shifter, udocker
 - Also HPC designed, built on top of Docker
 - Simple but less user friendly





- OS vendor tools
 - RedHat Podman, Buildah, Skopeo - new with RHEL 8
- Other Linux based container solutions
 - runC, LXC
- Orchestration tools
 - use containers to spin up servers
 - Kubernetes, Docker Compose



- Integrate with traditional HPC
 - Same user inside and outside of the container
 - Same file systems (home, scratch), environment
 - Can integrate with existing software (CHPC sys branch)
- Portable and sharable
 - A container is a file
 - It can be built on one OS and run on another
- Only Linux support right now
- Possible security issues due to the use of setUID executables
 - Hacker can exploit potential flaws in setUID programs to gain root
 - <https://sylabs.io/guides/3.6/user-guide/security.html>

- Containers need privilege escalation to run
 - Give sudo
 - Run root owned daemon process (Docker)
 - Use setUID programs (programs which parts can run in privileged mode) (Singularity now, udocker)
 - User namespaces – new Linux kernel feature to further isolate users (Charliecloud, limited Singularity, Docker)
 - Linux capability set – fine grained privilege isolation (Singularity future)
- In HPC environment
 - setUID if you have some trust in your users, user namespaces if you don't (and have newer Linux distribution – e.g. CentOS ≥ 7.4)



Interactive Development

```
sudo singularity build --sandbox tmpdir/ Singularity
```

```
sudo singularity build --writable container.img Singularity
```

BUILD ENVIRONMENT

Build from Recipe


```
sudo singularity build container.img Singularity
```

Remote build on Sylabs Cloud

```
sudo singularity build --remote container.img Singularity
```

Build from Docker

```
sudo singularity build container.img docker://ubuntu
```



Container Execution


```
singularity run container.img  
singularity shell container.img  
singularity exec container.img ...
```

Reproducible Sharing

```
singularity pull shub://...  
singularity pull docker://... *
```

PRODUCTION ENVIRONMENT

* Docker construction from layers not guaranteed to replicate between pulls




Run a pre-made container

- Building a container requires a root, or sudo
 - You can do that on your own machine
 - You can do that in the cloud (e.g. Sylabs Cloud, Docker Hub).
 - You can't do that at CHPC clusters
 - > build your containers locally, or on container hubs
- You can run a container as an user
 - You can run your own containers at CHPC
 - You can run CHPC provided containers at CHPC
 - You can run containers obtained on the internet at CHPC

- Containers are run in user space (no root required)
- An appropriate environment module has to be loaded
 - Singularity, udocker, Charliecloud
- User inside of the container
 - Current user
 - If specified, other user, including root
 - Root inside container is contained = can't be root outside
- Containers can't be modified by non-root user
 - One small exception with udocker

- Most containers reside in registries
 - Content delivery and storage systems for container images
- Docker Hub is the most common registry
 - <https://hub.docker.com>
 - Contains many channels, e.g. Biocontainers (<http://biocontainers.pro/>)
- There are a few other registries
- Sylabs (Singularity) also has a hub (library)
 - We'll use it to build a container

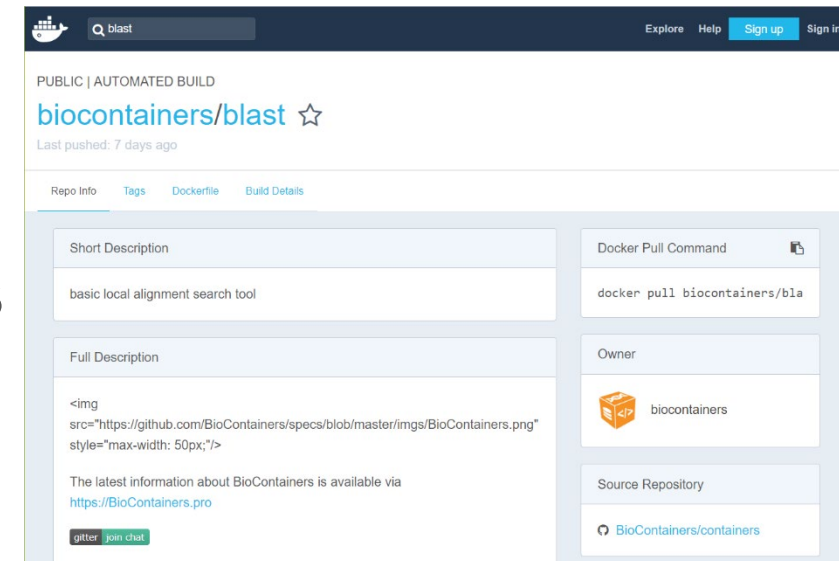

- Google or hub.docker.com search

– E.g. “blast docker”

- Use singularity (Sylabs library) search

```
$ singularity search lammeps
Found 4 containers for 'lammeps'
library://lammeps/default/lammeps_development
```

Tags: centos7

centos8 fedora30_mingw


fedora32_mingw ubuntu16.04

ubuntu18.04 ubuntu18.04_amd_rocm

ubuntu18.04_amd_rocm_cuda

ubuntu18.04_intel_openc1

ubuntu18.04_nvidia ubuntu20.04

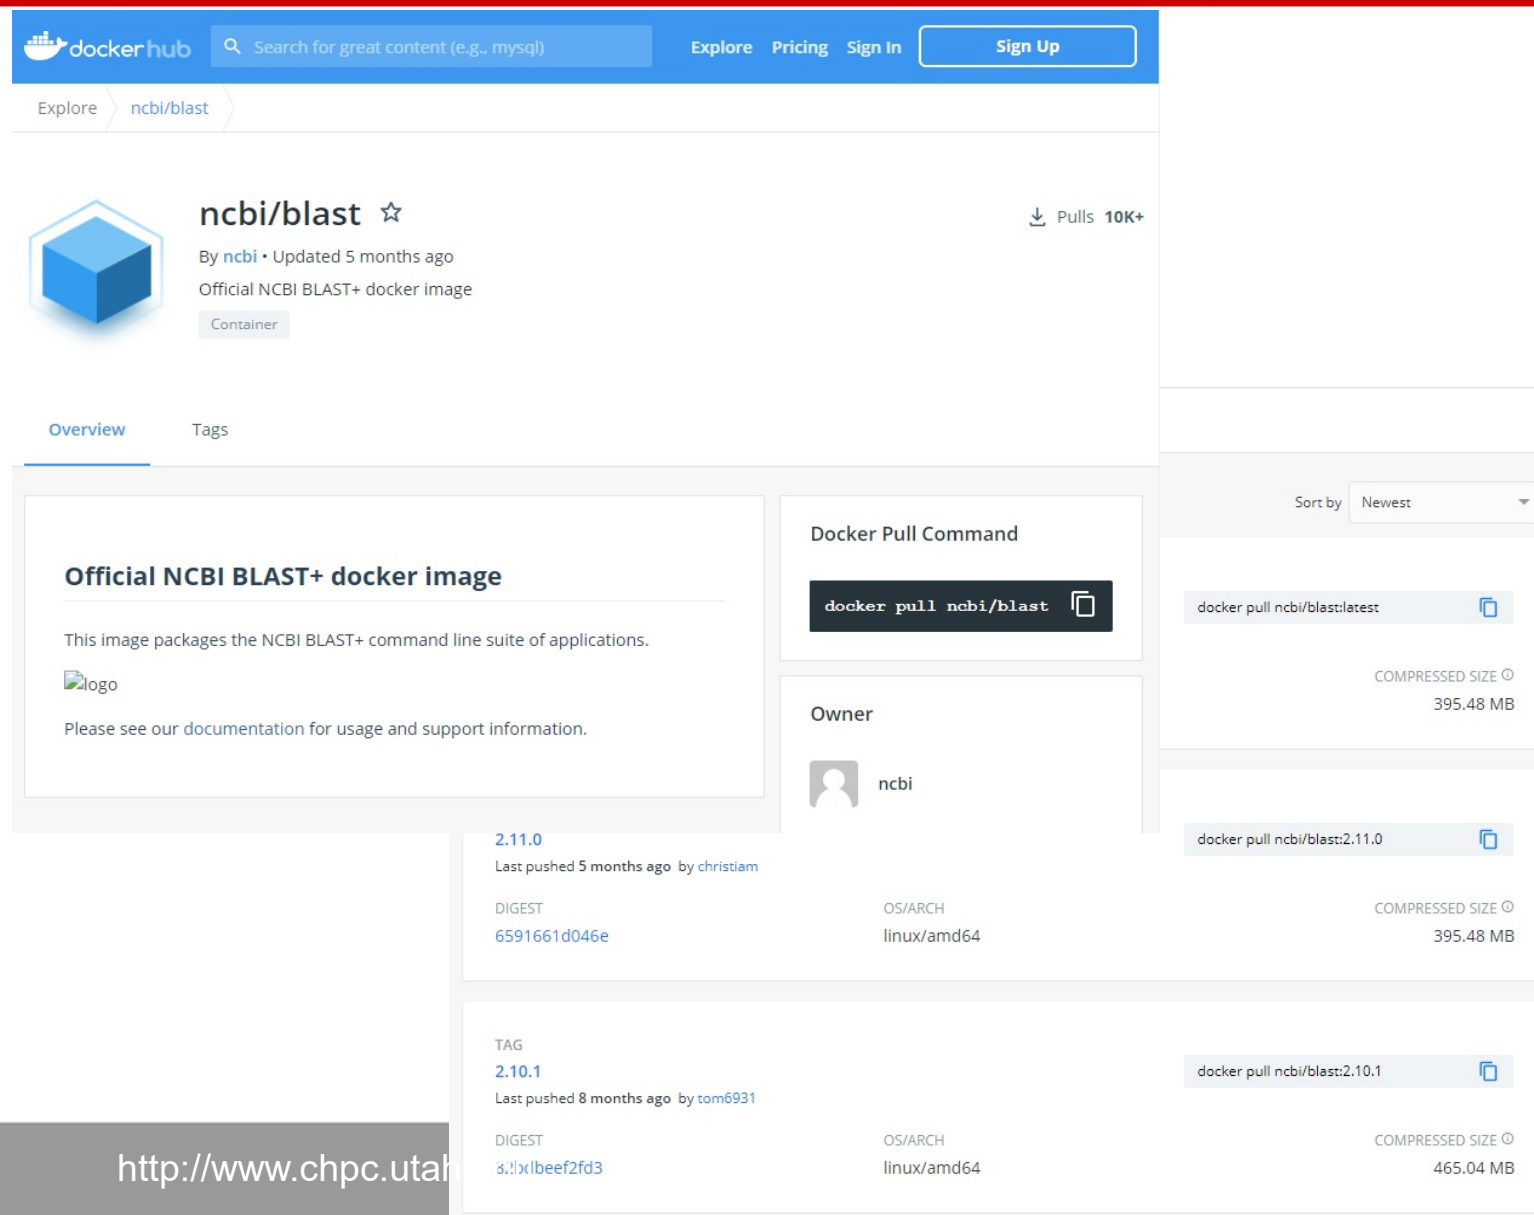

The screenshot shows the Docker Hub page for the **ncbi/blast** container image. The page includes a search bar at the top, navigation links (Explore, Pricing, Sign In, Sign Up), and a breadcrumb trail (Explore > ncbi/blast). The main content area displays the image name **ncbi/blast** with a star icon and a pull count of 10K+. Below this, there's a description: "Official NCBI BLAST+ docker image" and a link to the documentation. The "Overview" tab is selected, showing a description of the image and a link to the documentation. The "Tags" tab is also visible. On the right side, there's a "Docker Pull Command" section with the command `docker pull ncbi/blast`. Below that, the "Owner" section shows the user **ncbi**. The "Tags" section lists several versions of the image, including **2.11.0** and **2.10.1**, with their respective digests, OS/ARCH, and compressed sizes. The **2.11.0** tag is highlighted as the latest version.



- To get a shell in a container – `singularity shell`

```
$ singularity shell docker://ubuntu:latest
```

- To run a command in a container – `singularity exec`

```
$ singularity exec docker://ubuntu:latest cat /etc/os-release
```

- To run default command in a container – `singularity run`

```
$ singularity run docker://python
```

```
$ singularity pull docker://python
```

```
$ ./python-latest.sif
```

- default command is defined with Docker's `ENTRYPOINT` or `CMD` or Singularity's `runscript`

- To inspect a container – `singularity inspect`

```
$ singularity inspect --runscript python-latest.sif
```

- pull will download the container and create sif file
- build does the same but names sif file and has more options
- run/exec will download if needed and run

```
$ singularity pull docker://ubuntu:latest
```

- Singularity pulls the Docker layers to ~/.singularity, but puts sif file to local directory

```
$ singularity build my_ubuntu.sif docker://ubuntu:latest
```

```
$ ls
```

```
my_ubuntu.sif    ubuntu_latest.sif
```

```
$ singularity exec ubuntu_latest.sif /bin/bash
```

```
$ singularity shell ubuntu_latest.sif
```

- Let's create a Python script

```
echo 'print("hello world from the outside")' > myscript.py
```

- Now run this script using the system's Python

```
python ./myscript.py
```

- Now run the script in the DockerHub python container

```
singularity exec docker://python python ./myscript.py
```

...Conclusion: Scripts and data can be kept inside or outside the container. In some instances (e.g., large datasets or scripts that will change frequently) it is easier to containerize the software and keep everything else outside.

- Map host file systems into the container
- May be needed for non-standard named file systems
- Container has to recognize `/uufs` and `/scratch`
 - Singularity mounts common file systems automatically
 - CHPC specific file systems are added in Singularity module

```
$ export SINGULARITY_BINDPATH="/tmp"
```

```
$ singularity shell -B /scratch/local/$USER/$SLURM_JOBID:/tmp  
ubuntu_python.img
```

- **Specifying shell**


```
$ export SINGULARITY_SHELL=/bin/bash
```

```
$ singularity shell -s /bin/bash ubuntu_python.img
```

- Need to bring in the Nvidia driver stack
 - --nv runtime flag brings the drivers from the host
 - Still need to have a compatible CUDA installed in the container (older than or the same as the driver)
 - The present NVIDIA Driver at CHPC is 450.51, which is compatible with CUDA 11.0 or lower.
 - This means you can build a container by bootstrapping a base NVIDIA CUDA image (11.0 or lower) from: <https://hub.docker.com/r/nvidia/cuda/>
- On a GPU node, can e.g. execute:


```
singularity exec --nv docker://tensorflow/tensorflow:latest-gpu python -c  
"import tensorflow as tf; tf.config.list_physical_devices()"
```

- Need to bring the IB stack in the container
 - Some people bring the needed IB libraries from the host
 - For Ubuntu we prefer to install the Ubuntu stack
 - <https://github.com/CHPC-UofU/Singularity-ubuntu-mpi>
- MPI
 - Build inside the container with IB, or use CHPC's modules
 - Prefer MPICH and derivatives, OpenMPI is very picky with versions
 - If using OS stock MPI, then make sure to LD_PRELOAD or LD_LIBRARY_PATH ABI compatible libmpi.so with InfiniBand
 - <https://github.com/CHPC-UofU/Singularity-meep-mpi>




- Many Linux programs are binary compatible between distros
 - Most installed binaries are (Intel, PGI tools, DDT, ...)
- No need to install these in the container – use our NFS mounted software stack through Lmod
 - Need to have separate Lmod installation for Ubuntu due to some files having different location
- In the container
 - Install Lmod dependencies
 - Modify /etc/bash.bashrc to source our Lmod

<https://github.com/CHPC-UofU/Singularity-ubuntu-python/blob/master/Singularity>



- General HPC
 - Nvidia Container Toolkit - <https://github.com/NVIDIA/nvidia-docker>
 - E4S – Extreme-scale Scientific Software Stack – <https://e4s.io>
 - 50 programs, incl. GPU, multiple Linux Distro
 - Many other projects
- Interpreted languages
 - R - Rocker - <https://www.rocker-project.org/>
 - Python – official DockerHub - https://hub.docker.com/_/python



Building Singularity containers

1. Create a GitHub account if you don't have one
<https://github.com/join>
{Remember your username and password!}
2. Go to <https://cloud.sylabs.io/home>
click Remote Builder, then click Sign in to Sylabs and then Sign in with GitHub,
using your GitHub account
3. Go to <https://cloud.sylabs.io/builder>
click on your user name (upper right corner), select Access Tokens, write token
name, click Create a New Access Token, and copy it
4. In the terminal on frisco, run the following command and paste the token when
prompted:
`singularity remote login`

- On **any system** with Singularity, even without administrative privilege, you can retrieve and use containers:

- Download a container from Docker Hub

```
singularity pull docker://some_image  
singularity build mycont.sif docker://some_image
```

- Run a container

```
singularity run mycont.sif
```

- Execute a specific program within a container

```
singularity exec mycont.sif python myscript.py
```

- “Shell” into a container to use or look around

```
singularity shell mycont.sif
```

- Inspect an image

```
singularity inspect --runscript mycont.sif
```

- Complex software dependencies
 - Especially Python and R packages
 - bioBakery – intricate dependencies of Python and R which did not build on CentOS
 - SEQLinkage – instructions to build on Ubuntu using its packages
- Quick deployment
 - Some Linux distros provide program packages while others don't
 - paraview-python on Ubuntu via apt-get
- Deploying your own code or pipeline
- Modify or add onto an existing container

- Start with a the basic container (e.g. ubuntu:latest from Docker)
- Shell into the container
 - Install additional needed programs
 - If they have dependencies, install the dependencies – google for the OS provided packages first and install with apt-get/yum if possible
 - Put the commands in the `%post` scriptlet
- Build the container again
 - Now with the additional commands in the `%post`
 - If something fails, fix it, build container again
- Iterate until all needed programs are installed

- Build a container on a system on which you have administrative privilege (e.g., your laptop, singularity.chpc.utah.edu).
 - **Pros:** You can interactively develop the container.
 - **Cons:** Requires many GB of disk space, requires administrative privilege, must keep software up-to-date, container transfer speeds can be slow depending on personal network connection.
- Build a container on Sylabs Cloud
 - **Pros:** Essentially zero disk space required on your system, doesn't require administrative privilege, no software upgrades needed, easy to retrieve from anywhere, typically faster transfers from Sylabs Cloud to desired endpoint, interactive container development works.
 - **Cons:** Need to set up access to Sylabs Cloud, slower interactivity in the container development.

- Create a writeable container (the only choice in PE)

```
$ singularity build --sandbox mycont.sif ubuntu16.def
```

- This creates a container directory called `mycont.sif`

- If additional installation is needed after the build

- Shell into the container and do the install manually

```
$ sudo singularity shell -w -s /bin/bash mycont.img
```

- Execute what's needed, modify container definition file, repeat

- When done, create a production container

```
$ sudo singularity build ubuntu16.sif ubuntu16.def
```

Container definition file (a.k.a. recipe)



- Defines how the container is bootstrapped
 - Header – defines the core OS to bootstrap
 - Sections – scriptlets that perform additional tasks
- Header
 - Docker based (faster installation)

```
BootStrap: docker
```

```
From: ubuntu:latest
```

- Linux distro based

```
BootStrap: debootstrap
```

```
OSVersion: xenial
```

```
MirrorURL: http://us.archive.ubuntu.com/ubuntu/
```

```
Bootstrap:docker
From:ubuntu:latest


%labels
MAINTAINER Andy M

%environment
HELLO_BASE=/code
export HELLO_BASE

%runscript
echo "This is run when you run the image!"
exec /bin/bash /code/hello.sh "$@"

%post
echo "This section is performed after you bootstrap to build the image."
mkdir -p /code
apt-get install -y vim
echo "echo Hello World" >> /code/hello.sh
chmod u+x /code/hello.sh
```

- `%setup` Runs on the host
 - Install host based files (e.g. GPU drivers)
- `%post` Runs in the container
 - Install additional packages, configure, etc
- `%runscript` Defines what happens when container is run
 - Execution commands
- `%test` Runs tests after the container is built
 - Basic testing



- `%environment` Definition of environment variables
 - `%files` Files to copy into the container
 - `%labels` Container metadata
 - `%help` What displays during `singularity help` command
-
- More details at
https://sylabs.io/guides/3.6/user-guide/definition_files.html

1. Have a Sylabs Cloud account and its token linked to your CHPC account

2. Log in to Frisco: `ssh uxxxxxx@frisco1.chpc.utah.edu`

3. Create a recipe file for your container, name it “Singularity”, e.g.

```
$ nano Singularity
```

```
Bootstrap: docker
```

```
From: alpine:3.9
```

```
%post
```

```
apk update; apk upgrade; apk add bash
```

To exit and save type [ctrl-x], then “y”, then [enter].

4. Initialize Singularity and use `-remote` option to build


```
$ ml singularity
```

```
$ singularity build --remote alpine.sif Singularity
```

5. Container will be built in Sylabs Cloud and sif file brought back

6. Verify that the container is available by opening shell in it

```
$ singularity shell alpine.sif
```



Troubleshooting and Caveats


- Container problems are often linked with how the container “sees” the host system. Common issues:
 - The container doesn’t have a bind point to a directory you need to read from / write to
 - The container will “see” python libraries installed in your home directory (and the same is true for R and other packages). If this happens, set the PYTHONPATH environment variable in your job script so that it points to the container paths first.

```
export PYTHONPATH=<path-to-container-libs>:$PYTHONPATH
```
 - or use the `--cleanenv` option
- To diagnose the issues noted above, as well as others, “shelling in” to the container is a great way to see what’s going on inside.
- Also, look in the singularity.conf file for system settings (can’t modify).

- Failures during container pulls that are attributed (in the error messages) to `*tar.gz` files are often due to corrupt `tar.gz` files that are downloaded while the image is being built from layers. Removing the offending `tar.gz` file will often solve the problem. Look for them in the `~/.singularity` directory
- When building ubuntu containers, failures during `%post` stage of container builds from a recipe file can often be remedied by starting the `%post` section with the command “`apt-get update`”. As a best practice, make sure you insert this line at the beginning of the `%post` section in all recipe files for ubuntu containers.


- Overlays are additional images that are "laid" on top of existing images, enabling the user to modify a container environment without modifying the actual container. Useful because:
 - Overlay images enable users to modify a container environment even if they don't have root access (though changes disappear after session)
 - Root users can permanently modify overlay images without modifying the underlying image.
 - Overlays are a likely way to customize images for different HPC environments without changing the underlying images.
 - More on overlays:
https://www.sylabs.io/guides/3.6/user-guide/persistent_overlays.html

- You've built your container on your laptop. It is 3 Gigabytes. Now you want to move it to CHPC to take advantage of the HPC resources. What's the best way?
- Containers are files, so you can transfer them to CHPC just as you would a file:
 - Command line utilities (scp, sftp)
 - Globus or rclone (recommended)
<https://www.chpc.utah.edu/documentation/software/rclone.php>
<https://www.chpc.utah.edu/documentation/software/globus.php>
 - For more on data transfers to/from CHPC:
https://www.chpc.utah.edu/documentation/data_services.php




Containers for complex software

- Instructions say to
 - Install VirtualBox, Vagrant, and bioBakery from an archive
 - Great for a desktop, but, not for an HPC cluster
 - Further below they mention Google Cloud
- So we download the bioBakery archive, unpack it and look inside
 - Great, there is `google_cloud/build_biobakery.sh` script
 - In that file, Ubuntu 16.04 is mentioned




- Build base Ubuntu 16.04 container
 - sudo shell into the container
 - Start executing the lines of the build_biobakery.sh script, one after another
 - Some dependencies pop up, install them
 - Another caveat – Linuxbrew requires to be installed as non-root
 - Do some web searching and figure how to add a new user and run Linuxbrew as this user
 - In the end, add the correct paths to the container environment
- ```
$ echo "export PATH=/usr/local/bin:$PATH" >> /environment
```




- Once everything installs in the container
  - Run the bioBakery tests
  - Add %test section that run the bioBakery tests
  - Build the container again, now it will run the tests (will take a few hours)
- Create a module file or an alias to start the container
- See it all at

<https://github.com/CHPC-UofU/Singularity-bioBakery>




- No need to do this now as bioBakery is on DockerHub
- <https://hub.docker.com/u/biobakery>
- `singularity pull biobakery/workflows`
- Container has been uploaded, no Dockerfile
- Better alternative is to link DockerHub with GitHub for automated container builds
  - E.g. rocker, <https://hub.docker.com/u/rocker>
  - <https://docs.docker.com/docker-hub/builds/link-source/>


- <http://sylabs.io>
- <http://cloud.sylabs.io>
- <https://www.chpc.utah.edu/documentation/software/containers.php>
- <https://github.com/CHPC-UofU>



# Questions?




# Extra slides



# Windows in a container?


- What, Windows?
  - There are programs that researchers use that only run on Windows
  - E.g. data processing that comes with an instrument
- Our current approach
  - Tell them to run on our only Windows server
    - Gets oversubscribed quickly
  - Build a specific VM
    - Resource intensive for us, not high performing
- What if we could run Windows programs on our Linux clusters



- Windows compatibility layer on Linux
  - <https://www.winehq.org/>
  - Not an emulator – translates Windows system calls to Linux, provides alternative Windows system libraries,...
  - Actively developed, under CodeWeavers company umbrella
  - Windows ABI completely in user space
  - Most Linux distros come with some version of Wine
  - Generally better to use recent Linux distros for more recent Wine version (<https://www.winehq.org/download>)

- While Wine provides the basic Windows support, Winetricks is a set of scripts that install additional Windows libraries
  - Like library dependencies in Linux
  - `wintricks list` – to list available libraries
  - Most commonly used libraries are DirectX, .NET, VB or C runtimes

- Poached out of <http://dolmades.org/>
- Basic Singularity container
  - Recent Ubuntu or Fedora
  - Some winetricks work better on Fedora than Ubuntu, and vice versa
  - Include Wine repo from winehq to get the latest Wine version
  - Some experimentation is needed but if the Windows program is not complicated, chances of success are there



- Install Wine and Winetricks

```
dpkg --add-architecture i386
```

```
apt update
```

```
apt -y install wget less vim software-properties-common
python3-software-properties apt-transport-https winbind
```

```
wget https://dl.winehq.org/wine-builds/Release.key
```

```
apt-key add Release.key
```

```
apt-add-repository https://dl.winehq.org/wine-builds/ubuntu/
```

```
apt update
```

```
apt install -y winehq-stable winetricks
```

- User application
  - Done in `%runscript` section
  - First container launch creates WINEPREFIX (Windows file space), then installs the needed applications, and tars the whole WINEPREFIX for future use
  - Subsequent container launch untars WINEPREFIX and launches program


```
TEMPDIR="$ (mktemp -d) "
APPDIR="$HOME/WINE/Topofusion"
PROFILEDIR="$HOME/WINE/PROFILES/${USER}@${HOSTNAME} "
...
export WINEPREFIX="$TEMPDIR/wineprefix"
export WINEARCH="win32"

if [-f "$APPDIR/wineprefix.tgz"]; then
 echo "Found existing wineprefix - restoring it..."
 mkdir -p "$WINEPREFIX"; cd "$WINEPREFIX"; tar xzf "$APPDIR/wineprefix.tgz"
else
 wineboot --init
 echo "Installing TopoFusion and its dependencies ..."
 winetricks dlls directx9 vb6run
 wget http://topofusion.com/TopoFusion-Demo-Pro-5.43.exe
fi
wine ./TopoFusion-Demo-Pro-5.43.exe
```


- IDL 6.4 runtime + PeakSelector
  - IDL runtime under Linux crashes due to IDL bug
  - Windows runtime works fine, older IDL (ca. 2010)
  - <https://github.com/CHPC-UofU/Singularity-ubuntu-wine-peakselector>
- Topofusion
  - My favorite GPS mapping program, e.g.  
<http://home.chpc.utah.edu/~mcuma/summer16/madison/wed/>
  - Needs DirectX and VB runtime
  - <https://github.com/CHPC-UofU/Singularity-ubuntu-wine-topofusion>

- Very new application (Win10 like)
  - Installer was not functional under Wine
- Complex scientific application
  - .NET – did not install on Ubuntu, worked on Fedora
  - Microsoft SQL did not install – show stopper
- Wine application compatibility
  - <https://appdb.winehq.org/>
  - Notice a lot of games


- Success rate 2 out of 4 is not that great
  - Still worth trying, the chances are there
  - Singularity makes it easier to experiment
- It would be nice to have a HPC support for Windows so that
  - We would not need to have specialized Win machines
  - We would not have to build special purpose VMs
- May still need to look into the direction of reconfigurable HPC clusters like Bridges or Jetstream



# Prepare your computer for Singularity containers



- We need to run Linux to build/run Singularity
  - If you already run Linux, make sure you have a root
  - On Windows and Mac, we need to install Linux first
- Install Linux in a VM
  - Windows – GIT Bash, Virtual Box and Vagrant
    - <http://singularity.lbl.gov/install-windows>
  - Mac – Homebrew with Virtual Box and Vagrant
    - <http://singularity.lbl.gov/install-mac>



- Windows – GIT Bash, VirtualBox, Vagrant
  - GIT Bash provides a bash terminal on Windows
  - VirtualBox provides VM virtualization
  - Vagrant automates VM setup
- Mac – VirtualBox and Vagrant
  - Already have a terminal
  - Use Homebrew to install VirtualBox and Vagrant

- Start GIT Bash or Mac terminal and there
  - Create directory where the VM will live

```
$ cd <somewhere sensible>
```

```
$ mkdir singularity
```

```
$ cd singularity
```


- Initialize and download the Vagrant Box

```
$ vagrant init singularityware/singularity
```

```
$ vagrant up
```

<http://singularity.lbl.gov/install-windows>

<http://singularity.lbl.gov/install-mac>



- SSH to the spun up VM

```
$ vagrant ssh
```

- Now we are in the VM

```
vagrant@vagrant:~$ which singularity
/usr/local/bin/singularity
```

```
vagrant@vagrant:~$ singularity --version
2.4-dist
```

- In Ubuntu VM, or standalone Linux, follow [https://www.sylabs.io/guides/3.0/user-guide/quick\\_start.html#quick-installation-steps](https://www.sylabs.io/guides/3.0/user-guide/quick_start.html#quick-installation-steps) to install Singularity

\$